

IMPORTANT INSTALLATION CONSIDERATIONS

- NOTE:** Some showers may not provide an effective shower when used with gravity fed heated water systems or where pressures are less than 150kPa at the outlet. Additionally, showers with flow rates of less than 9L/min may not allow the following to function correctly:
 - some instantaneous water heaters
 - some tempering valves
 - some thermostatic mixing valves
- Some shower heads only operate correctly when hot and cold water supplies are both mains pressure and may not be suitable for some instantaneous hot water services.
- When water pressure is in excess of 500kPa a pressure limiting device is required in accordance with AS/NZS 3500 1.12 recommendation.

Operating Temperature:

Hot: Max 80°C*

Cold: Min 5°C

Inlet Connections:

All 1/2" BSP

IMPORTANT: Please read all of the instruction before installation


General:

- *This product must be installed in compliance with all relevant regional regulations.
- It is the responsibility of the installer to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall using silicone to ensure a seal is achieved.
- All pipe work must be thoroughly flushed prior to the installation of the hose.
- After installation all connections must be checked for leaks.
- All outlets used primarily for personal hygiene shall deliver water at a safe temperature as per regional regulations.

STEP 1


Wall lining hole should be sized as per the dimensions shown in the diagram.

Cut off the threaded nipple 10±2mm from the wall lining and apply thread seal tape to ensure a good seal.




STEP 2

Secure wall outlet bracket to the nipple by screwing until the sealing o-ring is tight against the wall lining.



STEP 3

Connect cone to filter washer to outlet bracket. Connect other hose end to handset.

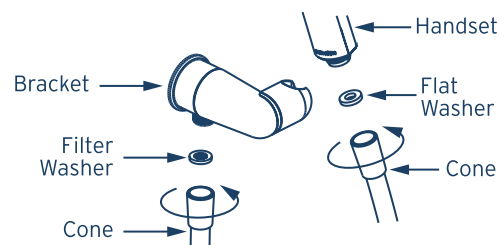

CARE & CLEANING:

Never use abrasives or abrasive cleaning agents to clean this product. Clean regularly with contamination free warm soapy water and a damp soft cloth.

THIS WARRANTY IS ISSUED BY:

GWA Group Limited
ABN 35 000 189 499
1 Melito Court Prestons
NSW 2170
www.flexispray.com.au

FLEXISPRAY REPLACEMENT GUARANTEE

The warranty covers replacement of faulty components only. Warranty does not cover inspection or installation. The product is guaranteed under normal domestic use and is subject to conditions. See flexispray.com.au for details. We reserve the right to vary specifications or delete models from our range without prior notification.

Customer Service (Australia)
National Call Centre 13 14 16

W
AS/NZS 3662
WMKT21090



Part No: 96-1030 MAR20